




Weight:
440g/m²

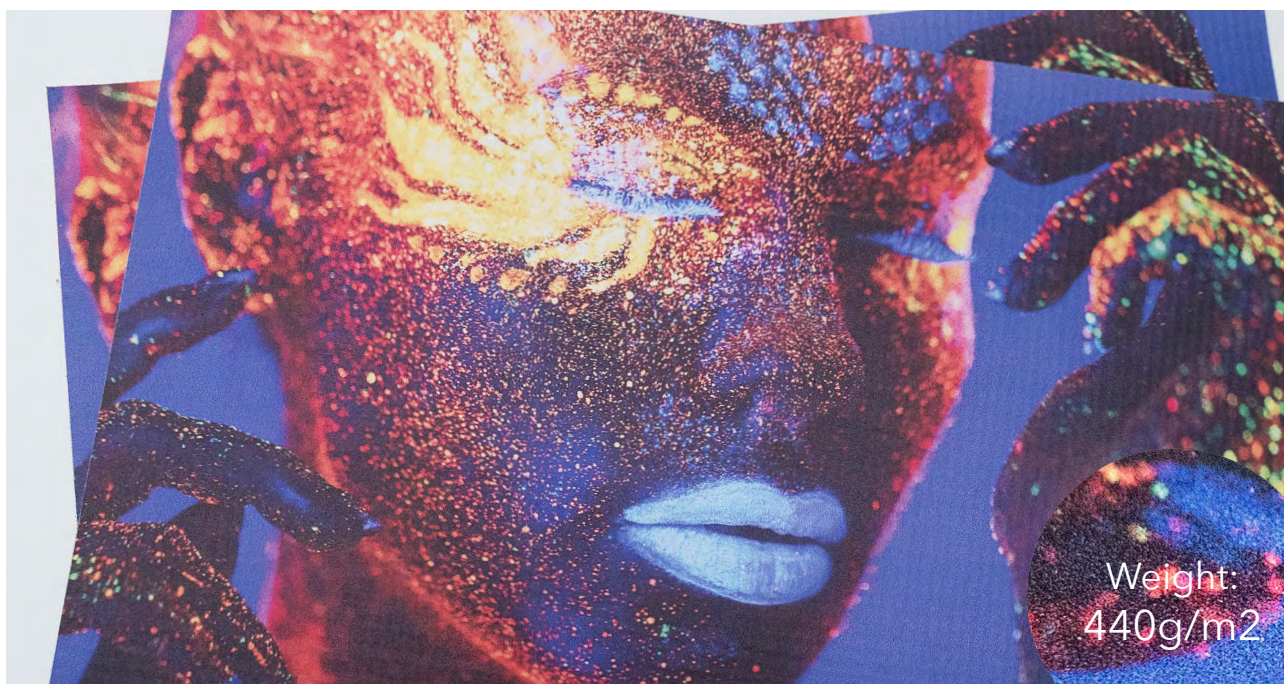

Frontlit Standard

Technical Parameters

No.	Parameter	Description
1.	Fabric technical name:	FRONTLIT MATT 440G
2.	Type of fabric:	High tenacity yarns 100% PES (840D*840D)
4.	Fabric weight:	± 440 g/m ²
	Maximum print width	Up to 5 m
5.	Weave Method	Weaving 28*28
6.	Weight of fabric	75 g/m ²
7.	Weight of pvc coating	365 g/m ²
8.	Tensile strength	Warp: 1300 N/5cm, Weft: 1100 N/5cm
9.	Tearing strength	Warp: 125 N, Weft: 100 N
10.	Suitable temperature	-20 / +70°C

Frontlit Standard

Frontlit Matt 440G is a versatile banner material designed for high-quality large-format printing with a smooth, matte finish. Its surface provides excellent color reproduction and sharp image definition, making it ideal for outdoor advertising, building graphics, and promotional displays where visual impact is key.

The material combines flexibility and durability, allowing for easy handling, installation, and long-term use in a variety of signage and display applications. Its robust construction ensures reliable performance even under demanding conditions.

Printhing technology:

	Direct sublimation	Transfer sublimation	UV
Printing compatibility	✗	✗	✓ single-sided

Compatible product



Elevation Banner



Fence Cover



Banner


Standard Finishing




Tunnel



Band (On Back)



Edge Reinforcement + Eyelet



Keder 8,5 Mm



Do you need any advice?
Contact with our Customer Service! [Click here](#)