




Heavytex 265

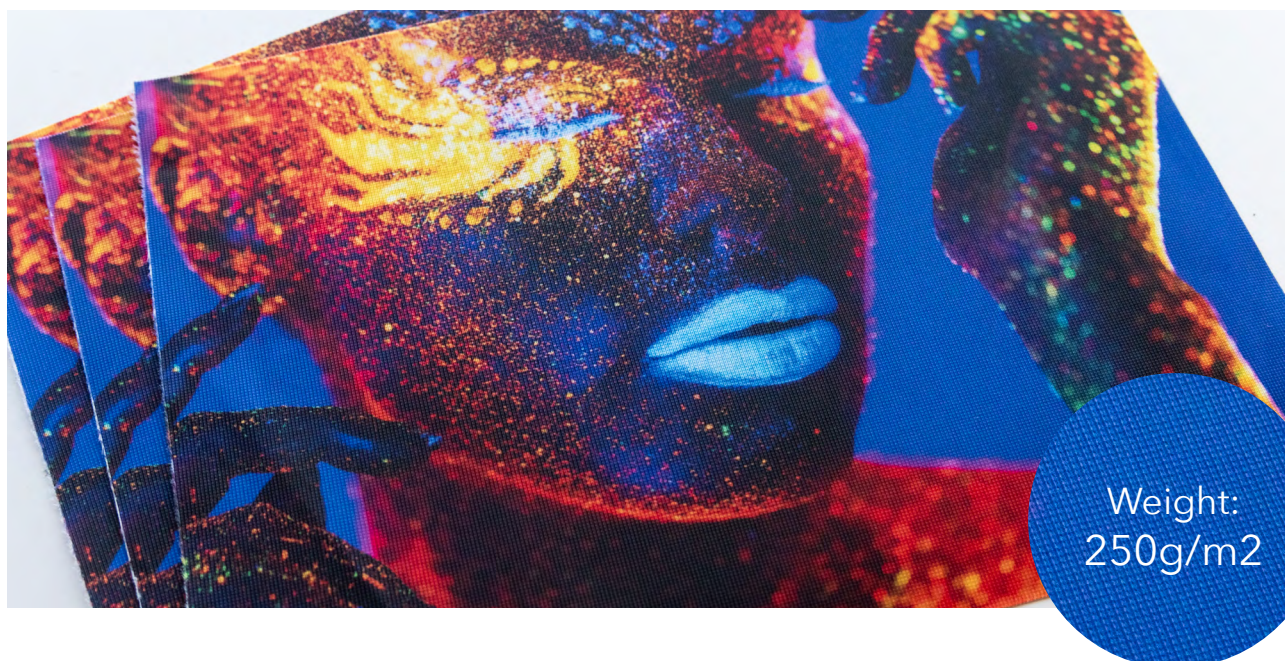

Technical Parameters

No.	Parameter	Description
1.	Fabric technical name:	PES-Dekotex mit "INKTeX+® FL Ausrüstung"
2.	Type of fabric:	7095FL with flame retardant treatment
3.	Type of raw material:	100 % Polyester
4.	Fabric weight:	250 g/m2
5.	Maximum print width	310 cm
6.	Making-up	rolled on paper cores
7.	Packaging	wrapped with foil
8.	Ecological standards:	according to STANDARD 100 by OEKO-TEX, product class 2 (direct contact with skin)
9.	Shrinkage	Heat Shrinkage, 195 °C, 90 sec, lengthwise: -2.5 %, crosswise: -2.5 %
10.	Thickness	0.50 mm
11.	Knit textile retardant	Standard BI DIN 4102-I

Heavytex 265

Heavytex 265 is a durable polyester textile developed for high-quality digital printing. The material is intended for indoor advertising and decorative applications where a smooth surface and color consistency are important. Thanks to its flame-retardant finish, Heavytex 265 is suitable for public and commercial interiors.

Printing technology:

	Direct sublimation	Transfer sublimation	UV
Printing compatibility	✗	✓	✗

Compatible product



Banner


Standard Finishing



Standard Double Stitching




Tunnel



Band (Sewn-On)



Band (On Back)



Edge Reinforcement + Eyelet



Keder 8,5 Mm



Do you need any advice?
Contact with our Customer Service! [Click here](#)